

**283018 (Z0UUCEBOMOH)**

Electric Salamander, open on 3 sides, plate detection system, 600 mm, accept GN 1/1

283019 (Z0UUCDBOMOH)

Electric Salamander, open on 3 sides, plate detection system, 600 mm, accept GN 1/1

Main Features

- Touch-controlled plate detecting bar switches on the salamander when the plate is placed in the appliance and switches it off when the plate is removed.
- Fast heat up: about 20 seconds to work at full performance.
- Control panel with a knob and digital display to set the cooking time.
- Set time can be stored to simplify the repetition of similar cooking cycles.
- START and STOP touch button.
- Cooking plate size: 600x350 mm accept GN 1/1.
- Timer can be set from 0 to 99 minutes and interrupts electricity supply at the end of cooking time.
- 2 independent high-efficient tungsten filament heating elements allowing to heat up a half or full cooking surface.

Construction

- 4 rubber feet.
- Movable upper plate.
- Removable stainless steel drip tray.
- Table top unit can be wall mounted with dedicated optional accessory.
- Made of AISI 304 stainless steel.
- Air vents along the upper side for evacuating heat and smoke.
- Chromium-plated steel grid with a safety stop to avoid accidental fall.

Sustainability

- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).



Salamanders


Electric Salamander, open on 3 sides - 600 mm

Optional Accessories


PNC Code	Description
Other accessories	
283035	Wall mounted brackets kit for salamanders open on 3 sides

Technical specifications


	283018	283019	Front
Electric			
Supply voltage:	220-240 V/1 ph/50/60 Hz	380-415 V/3N ph/50/60 Hz	
Key Information:			
External dimensions, Width:	600 mm	600 mm	
External dimensions, Depth:	549 mm	549 mm	
External dimensions, Height:	510 mm	510 mm	
Net weight:	50 kg	50 kg	

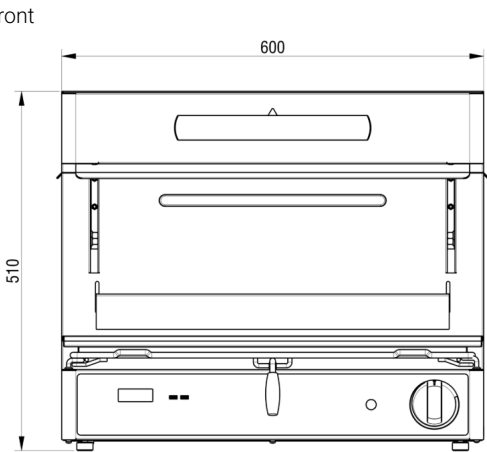

Side

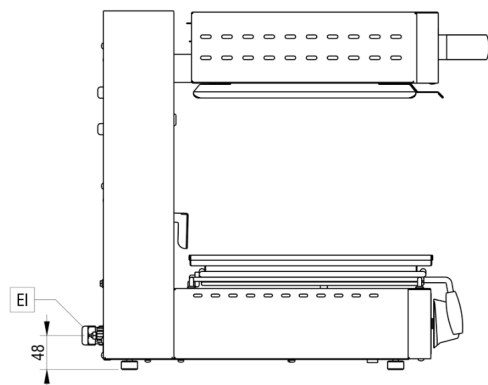

Top

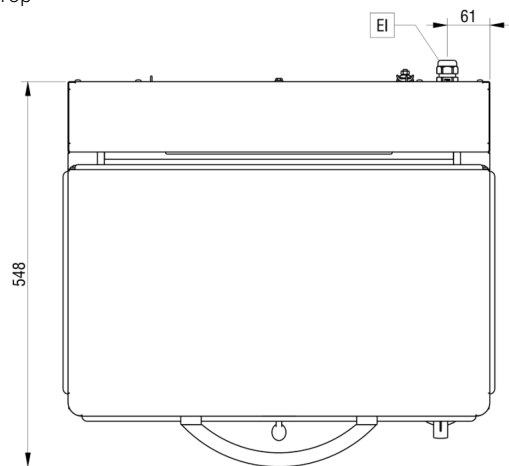

EI = Electrical inlet (power)

