

**372294 (Z7TTEECOMIN)**

Freezer base with 2 drawers, -15-20°C - R290

Main Features

- Anti-tilt runners accept GN 1/1 containers.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Right angled side edges eliminate gaps and possible dirt traps between units.
- Unit can be easily installed below other 700 line top models.
- Adjustable temperature range from -15 °C to -22 °C to suit meat, fish and dairy storage requirements.
- Adjustable temperature range from -15 °C to -20 °C to suit meat, fish and dairy storage requirements.
- Defrosting and automatic evaporation of condense drain: the condense is automatically evaporated thanks to the electric resistance in the condense drain container.
- GN compliant.
- Designed for modular installation into the cooking block.

Construction

- Access to all components from the front.
- Constructed in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Built-in compressor to suit operating conditions.
- Unit delivered with 150 mm height adjustable feet in Stainless steel. Feet can be extended up to 250 mm.

Sustainability

- CFC and HCFC free (highly ecological refrigerant type: R290).

Optional Accessories

PNC Code	Description
Bases & base accessories	
206351	2 DRAWERS FOR REFRIGERATED BASE 700 LINE
Feet, wheels and ramps	
206136	Flanged feet kit
206210	4 feet for concrete installation (not for 900 line freestanding grill)
206432	Kit 6 wheels - 3 swivelling with brake
206444	Kit to install refrigerated base on wheels (wheels to be ordered separately)
Kicking strips	
206151	Frontal kicking strip for concrete installation, 1200 mm
206178	Frontal kicking strip, 1200 mm
206249	Pair of side kicking strips
206265	Pair of side kicking strips (concrete installation)
Panels	
206248	2 panels for service duct (single installation)
206376	Rear paneling - 1200mm (EVO700/900)
Other accessories	
206319	2 side covering panels, height 700 mm, depth 700 mm
206348	2 drawers for refrigerated base

Recommended Detergents

PNC Code	Description
0S2292	C41 HI-TEMP RAPID DEGREASER 6pcx1L+1 trigger
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2882	S02 DEGREASER 6pzx750ml - ADR&IMDG Limited Quantity
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

Technical specifications

Electric

Supply voltage:	220-230 V/1N ph/50 Hz
Total Watts:	0.5 kW
Plug type:	CE-SCHUKO


Key Information:

External dimensions, Width:	1200 mm
External dimensions, Depth:	700 mm
External dimensions, Height:	600 mm
Net weight:	95 kg
Shipping weight (gross):	108 kg
Shipping height:	820 mm
Shipping width:	1300 mm
Shipping depth:	800 mm
Shipping volume:	0.85 m³
Gross capacity:	120 liter


Sustainability

Refrigerant weight:	90 g
---------------------	------


Front

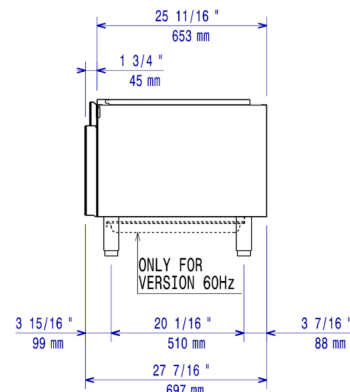

Side

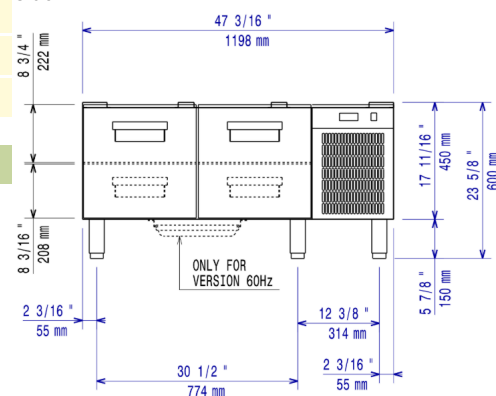

Top

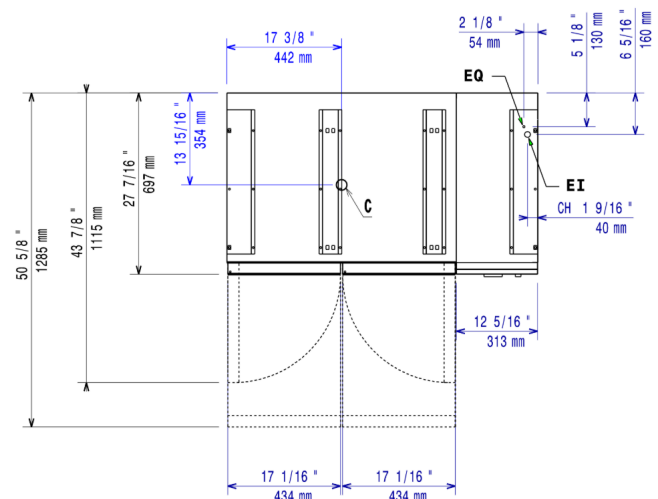

EI = Electrical inlet (power)



Part of



**Electrolux
Professional
Group**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

www.zanussiprofessional.com

2026/07/28

3/3