

**392595 (Z9AAGTBBMKI)**

8-burner (2x10 kW, 6x6 kW) gas range on 2 gas ovens (8,5 kW each), Q Mark

**Main Features**

- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPX5 water protection.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Protected pilot light.
- The special design of the control knob system guarantees against water infiltration.
- Base compartment consists of two gas heated standard oven with stainless steel burners and self stabilizing flame positioned beneath the base plate. Oven chamber to have 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans) and ribbed cast iron base plate.
- Burners with optimized combustion.
- Unit to be mounted on stainless steel feet with height adjustment up to 50 mm. Unit can be easily mounted on cantilever systems.
- Oven thermostat adjustable from 120 °C to 280 °C.
- 40 mm thick oven door for heat insulation.
- The six 6 kW and two 10 kW high efficiency burners are available in two different sizes to suit high performing cooking requirements of the most demanding customers: - 60 mm burners with power regulation from 1,5 to 6 kW - 100 mm burners with power regulation from 2.2 kW to 10 kW

**Construction**

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- AISI 304 stainless steel worktop, 2mm thick.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Pan supports in stainless steel.
- Unit is 900mm deep to give a larger working surface area.

**Included Accessories**

| PNC Code | Description                       | Quantity |
|----------|-----------------------------------|----------|
| 164250   | GN2/1 chrome grid for static oven | 2        |

## Optional Accessories

| PNC Code                              | Description                                                                                                    |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------|
| <b>Burner grids, plates, supports</b> |                                                                                                                |
| 206170                                | Single burner radiant plate for pan support                                                                    |
| 206171                                | Single burner smooth plate for direct cooking - fits frontal burners only                                      |
| 206172                                | Single burner ribbed plate for direct cooking - fits frontal burners only                                      |
| 206298                                | Stainless steel grid for 2 burners                                                                             |
| 206363                                | Wok pan support for open burners (EVO700/900)                                                                  |
| <b>Chimney upstands</b>               |                                                                                                                |
| 206400                                | Chimney grid net, 400mm                                                                                        |
| <b>Containers, trays and grids</b>    |                                                                                                                |
| 164250                                | GN2/1 chrome grid for static oven                                                                              |
| <b>Feet, wheels and ramps</b>         |                                                                                                                |
| 206135                                | 4 wheels, 2 swivelling with brake (EVO700/900). It is mandatory to install with base supports for feet/wheels. |
| 206136                                | Flanged feet kit                                                                                               |
| 206210                                | 4 feet for concrete installation (not for 900 line freestanding grill)                                         |
| 206369                                | Base support for feet or wheels - 1600mm (EVO700/900)                                                          |
| 206370                                | Base support for feet or wheels - 2000mm (EVO700/900)                                                          |
| <b>Gas nozzles</b>                    |                                                                                                                |
| 206458                                | Kit G.25.3 (NI) gas nozzles for 900 freestanding gas cookers on oven                                           |
| <b>Handrails</b>                      |                                                                                                                |
| 206165                                | Side handrail for right/left hand                                                                              |
| 206192                                | Frontal handrail 1600 mm                                                                                       |
| 216050                                | FRONTAL HANDRAIL 1600 MM                                                                                       |
| <b>Installation solutions</b>         |                                                                                                                |
| 206086                                | Junction sealing kit                                                                                           |
| <b>Kicking strips</b>                 |                                                                                                                |
| 206152                                | Frontal kicking strip for concrete installation, 1600 mm                                                       |
| 206157                                | Pair of side kicking strips for concrete installation                                                          |
| 206179                                | Frontal kicking strip, 1600 mm                                                                                 |
| 206180                                | Pair of side kicking strips                                                                                    |
| <b>Other accessories</b>              |                                                                                                                |
| 927225                                | Pressure regulator for gas units                                                                               |
| <b>Panels</b>                         |                                                                                                                |
| 206181                                | 2 panels for service duct (single installation)                                                                |
| 206202                                | 2 panels for service duct (back to back installation)                                                          |

| PNC Code                 | Description                                                        |
|--------------------------|--------------------------------------------------------------------|
| <b>Water taps</b>        |                                                                    |
| 206289                   | Water column with swivel arm (water column extension not included) |
| 206290                   | Water column extension                                             |
| <b>Other accessories</b> |                                                                    |
| 206335                   | 2 side covering panels, height 700 mm, depth 900 mm                |
| 206385                   | Kit town gas nozzles (G150) for EVO900 gas ranges on gas oven      |

## Recommended Detergents

| PNC Code | Description                                                                   |
|----------|-------------------------------------------------------------------------------|
| 0S2292   | C41 HI-TEMP RAPID DEGREASER 6pcx1L+1 trigger                                  |
| 0S2881   | S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T                   |
| 0S2882   | S02 DEGREASER 6pzx750ml - ADR&IMDG Limited Quantity                           |
| 0S2883   | S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity |
| 0S2884   | S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML                       |
| 0S3257   | S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity         |

# Technical specifications


## Gas

|                        |               |
|------------------------|---------------|
| Gas Power:             | 73 kW         |
| Standard gas delivery: | G30 – 50 mbar |
| Gas Type Option:       | G31 37 mbar   |
| Gas Inlet:             | 1/2"          |


## Key Information:

|                                  |                        |
|----------------------------------|------------------------|
| Oven working Temperature:        | 120 °C MIN; 280 °C MAX |
| Oven Cavity Dimensions (width):  | 575 mm                 |
| Oven Cavity Dimensions (height): | 300 mm                 |
| Oven Cavity Dimensions (depth):  | 700 mm                 |
| Net weight:                      | 300 kg                 |
| Shipping weight (gross):         | 350 kg                 |
| Shipping height:                 | 1030 mm                |
| Shipping width:                  | 1020 mm                |
| Shipping depth:                  | 1780 mm                |
| Shipping volume:                 | 1.87 m <sup>3</sup>    |
| Front Burners Power:             | 6 - 6 kW               |
| Back Burners Power:              | 10 - 10 kW             |
| Certification group:             | N9CG                   |
| Back Burners Dimension - mm      | Ø 100 Ø 100            |
| Front Burners Dimension - mm     | Ø 60 Ø 60              |


## Front

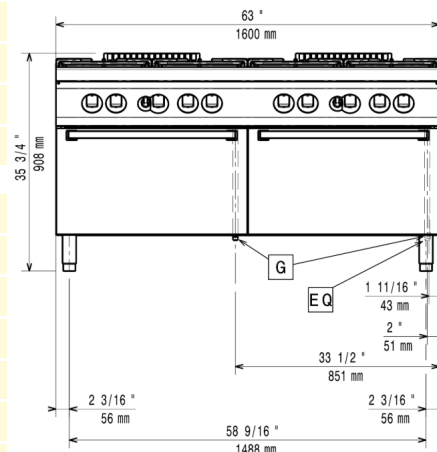

## Side

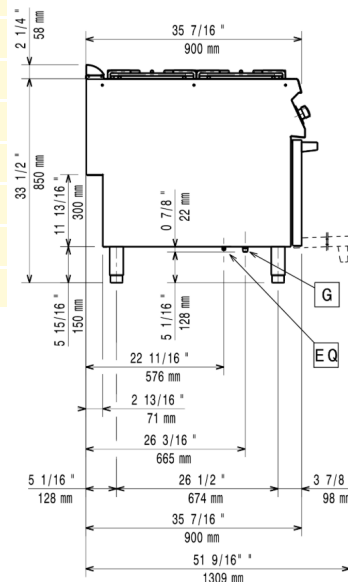

## Top

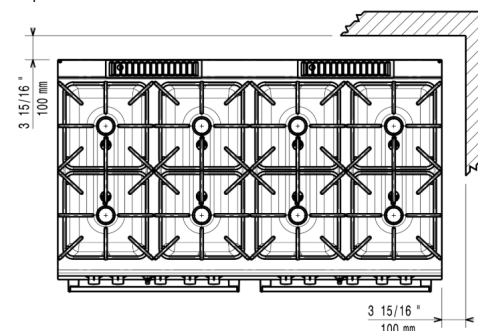

G = Gas connection