

Modular Cooking Range Line EVO700 400mm Electric Fry Top, Smooth Brushed Chrome Plate

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**372325 (Z7IIKDAOMCA)**

Half module electric fry top with smooth brushed chrome cooking plate, sloped, thermostatic control, scraper included

372321 (Z7IIKIAOMCA)

Half module electric fry top with smooth brushed chrome cooking plate, sloped, 230V, thermostatic control, scraper included

Short Form Specification

Item No. _____

To be installed on open base installations or bridging supports. Smooth cooking surface in brushed chrome. Temperature range from 120°C to 280°C. Removable drawer below the cooking surface for the collection of grease and fat. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Large drain hole on cooking surface permits the draining of fat into large 1 liter collector placed under the cooking surface.
- Large grease collection container available as optional accessory to be installed under top units over open base cupboard.
- Safety thermostat and thermostatic control.
- Stainless steel high splash guard on the rear and sides of cooking surface. Splash guard can be easily removed for cleaning.
- IPx4 water protection.
- Frontal simmering zone.
- Temperature range from 120° up to 280°C.
- Rough brushed chrome surface is highly resistant to scratches and facilitates cleaning operations at the end of the day.
- Scraper for smooth plate included as standard.
- Infrared heating elements mounted below the cooking surface.
- Suitable for countertop installation.

Construction

- Cooking surface completely smooth.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Cooking surface 12mm thick brushed chrome for optimum grilling results and ease of use.

APPROVAL: _____

Included Accessories

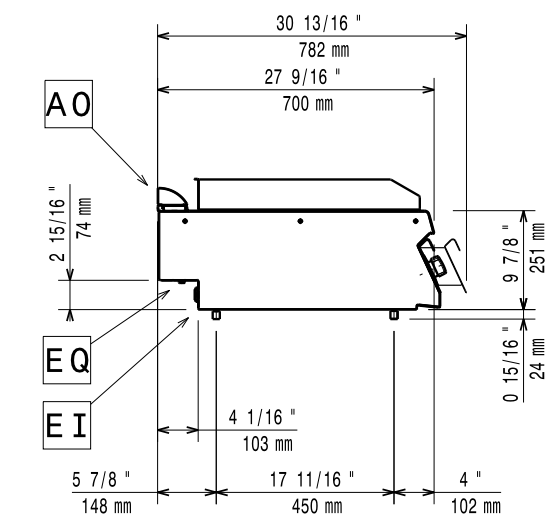
- 1 of Scraper for smooth plate for fry tops PNC 164255

Optional Accessories

- Scraper for smooth plate for fry tops (only for 372325) PNC 164255 ☐
- Junction sealing kit (only for 372325) PNC 206086 ☐
- Support for bridge type installation, 800 mm (only for 372325) PNC 206137 ☐
- Support for bridge type installation, 1000 mm (only for 372325) PNC 206138 ☐
- Support for bridge type installation, 1200 mm (only for 372325) PNC 206139 ☐
- Support for bridge type installation, 1400 mm (only for 372325) PNC 206140 ☐
- Support for bridge type installation, 1600 mm (only for 372325) PNC 206141 ☐
- Support for bridge type installation, 400 mm (only for 372325) PNC 206154 ☐
- Frontal handrail 400 mm (only for 372325) PNC 206166 ☐
- Frontal handrail 800 mm (only for 372325) PNC 206167 ☐
- Large handrail (portioning shelf) 400 mm (only for 372325) PNC 206185 ☐
- Large handrail (portioning shelf) 800 mm (only for 372325) PNC 206186 ☐
- Frontal handrail 1200 mm (only for 372325) PNC 206191 ☐
- Frontal handrail 1600 mm (only for 372325) PNC 206192 ☐
- Right and left side handrails (only for 372325) PNC 206240 ☐
- Chimney upstand, 400 mm (only for 372325) PNC 206303 ☐
- 2 side covering panels, height 250 mm, depth 700 mm (only for 372325) PNC 206320 ☐
- Grease/oil container kit for frytops (only for 372325) PNC 206346 ☐
- Base support for feet or wheels - 800mm (EVO700/900) (only for 372325) PNC 206367 ☐
- Chimney grid net, 400mm (only for 372325) PNC 206400 ☐
- Cloche for fry tops (only for 372325) PNC 206455 ☐

Modular Cooking Range Line EVO700 400mm Electric Fry Top, Smooth Brushed Chrome Plate

Front

Side


EI = Electrical inlet (power)
EQ = Equipotential screw

Top


Electric

Supply voltage:

372325 (Z7IIKDAOMCA)	400 V/3 ph/50-60 Hz
372321 (Z7IIKIAOMCA)	230 V/3 ph/50/60 Hz

Predisposed for:

Electrical power, max:

372325 (Z7IIKDAOMCA)	4.2 kW
372321 (Z7IIKIAOMCA)	3.9 kW

Total Watts:

372325 (Z7IIKDAOMCA)	4.2 kW
372321 (Z7IIKIAOMCA)	3.9 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Working Temperature MIN:	120 °C
Working Temperature MAX:	280 °C
External dimensions, Width:	400 mm
External dimensions, Depth:	700 mm
External dimensions, Height:	250 mm
Net weight:	40 kg

Shipping weight:

372325 (Z7IIKDAOMCA)	40 kg
372321 (Z7IIKIAOMCA)	47 kg

Shipping height:

372325 (Z7IIKDAOMCA)	530 mm
372321 (Z7IIKIAOMCA)	540 mm

Shipping width:

Shipping width:	460 mm
-----------------	--------

Shipping depth:

Shipping depth:	820 mm
-----------------	--------

Shipping volume:

Shipping volume:	0.2 m ³
------------------	--------------------

Cooking surface width:

Cooking surface width:	330 mm
------------------------	--------

Cooking surface depth:

Cooking surface depth:	540 mm
------------------------	--------