

**132793 (MTC1610PN)**

Hot cupboard with 1 shelf and 2 sliding doors and upstand, ventilated, 1600mm

**Main Features**

- Digital display thermostat to control the internal temperature.
- Model specific to keep dishes warm.
- Handles in stainless steel for better hygiene and reliability.
- Sturdiness, stability and reliability of table accurately tested.

**Construction**

- 50 mm worktop in 304 AISI stainless steel with upturned edges, incorporates an 18 mm layer of sound deadening material.
- Reinforced side and base panel in 304 AISI stainless steel.
- Inner welded frame in stainless steel to guarantee superior strength and stability.
- Equipped with intermediate shelf which can be positioned at three different heights.
- Intermediate shelf in stainless steel with riveted corners and trasversal reinforcement in stainless steel.
- Sturdy sound-deadened sliding doors on tracks located flush to the front of the frame.
- Easy access to the cupboard interior on all lengths guaranteed by the use of only 2 doors.
- 100 mm upstand with 10 mm radiused corner and 13 mm deep, designed to be used against a wall.
- Base panel has 40mm high profile, is 8/10 in thickness with upturned edges and bar reinforcement. It is welded to legs for further structure reinforcement.
- Upstand back completely covered with Stainless Steel welded profile.
- 304 AISI stainless steel feet, 150 mm high and 54 mm in diameter, adjustable by -35/+25 mm.

**Optional Accessories**

| PNC Code                      | Description                                                   |
|-------------------------------|---------------------------------------------------------------|
| <b>Feet, wheels and ramps</b> |                                                               |
| 855299                        | Wheel kit for cupboards, 4 wheels (2 with brakes), D=100 mm   |
| <b>Shelves</b>                |                                                               |
| 132967                        | Overshelf, neutral, one tier, 1600 mm                         |
| 132991                        | Overshelf, with led light and ceramic light, one tier, 1600mm |

## Recommended Detergents


| PNC Code | Description                                                                   |
|----------|-------------------------------------------------------------------------------|
| 0S2881   | S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T                   |
| 0S2883   | S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity |
| 0S2884   | S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML                       |
| 0S3257   | S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity         |

# Technical specifications


## Electric

|                                     |                          |
|-------------------------------------|--------------------------|
| <b>Supply voltage:</b>              | 220-240 V/1N ph/50/60 Hz |
| <b>Key Information:</b>             |                          |
| <b>Cabinet width:</b>               | 1545 mm                  |
| <b>Cabinet depth:</b>               | 645 mm                   |
| <b>Cabinet height:</b>              | 610 mm                   |
| <b>Cabinet temperature:</b>         | 50-75 °C                 |
| <b>External dimensions, Width:</b>  | 1600 mm                  |
| <b>External dimensions, Depth:</b>  | 700 mm                   |
| <b>External dimensions, Height:</b> | 1000 mm                  |
| <b>Upstand Dimensions, Height:</b>  | 100 mm                   |
| <b>Upstand Dimensions, Depth:</b>   | 13 mm                    |
| <b>Upstand Dimensions, Radius:</b>  | R=10                     |
| <b>Number and type of doors:</b>    | 2 Sliding                |
| <b>Worktop thickness:</b>           | 50 mm                    |
| <b>Net weight:</b>                  | 65 kg                    |


Front

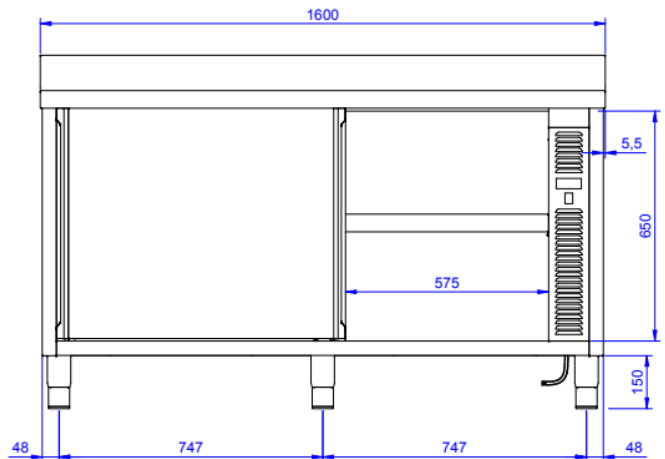

Side

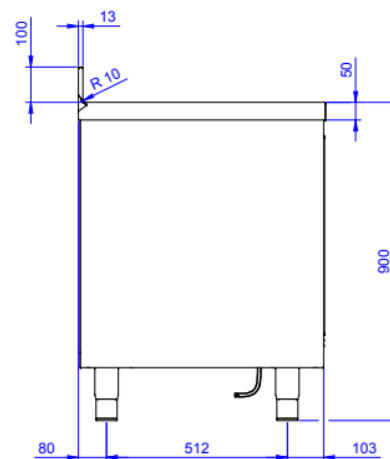

Top

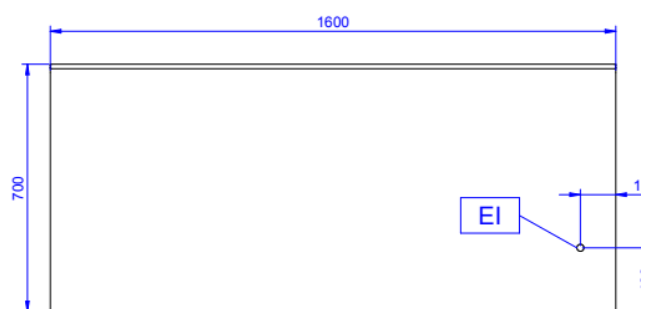

EI = Electrical inlet (power)

