

**644220 (ABPV1112BT)**

430 stainless steel wall hood with filters and exhauster

Main Features

- Low noise level.
- External panels with upturned edges to avoid injuries.
- Prearranged for installation of lighting.

Construction

- Eyebolts and screw anchors for ceiling installation.
- 430 AISI stainless steel labyrinth filters easily removable for cleaning.
- 304 AISI stainless steel condensation collection tray.
- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- 304 AISI stainless steel blind panels for a correct exhaustion.
- Outlet holes are sized in order to minimize drops in pressure.
- Perimetral gutter with drain hole to transfer grease into a 304 AISI container.
- Entirely constructed in 430 AISI stainless steel.
- Lead hole for electric cable on top.

Optional Accessories

PNC Code	Description
Other accessories	
644800	LED strip for hoods 650 mm

Technical specifications

Electric

Supply voltage: 220-240 V/1N ph/50 Hz

Built-in Fan Power: 300 W

Key Information:

External dimensions, Width: 1200 mm

External dimensions, Depth: 1100 mm


External dimensions, Height: 500 mm

Net weight: 43 kg


Air Emission:

Air capacity: 1900 mc/h


Front



Side

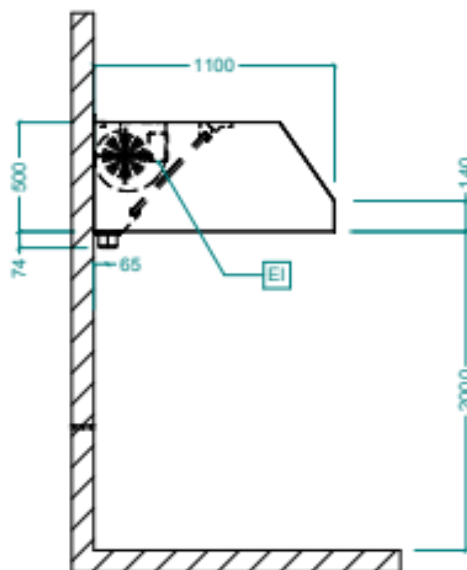

Top

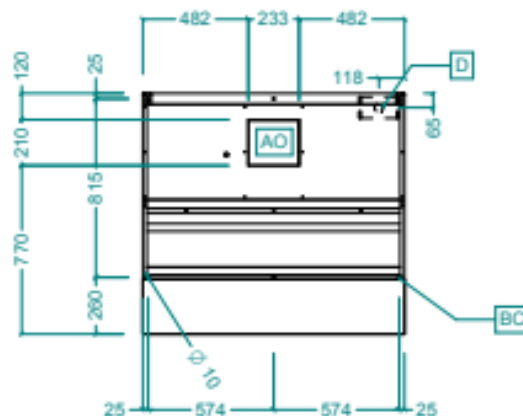

EI = Electrical inlet (power)



Part of



**Electrolux
Professional
Group**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

www.zanussiprofessional.com

2026/05/11

2/2