

**640042 (STCF2632)**

304 s/s island hood with filters and lamps

Main Features

- Low noise level.
- External panels with upturned edges to avoid injuries.
- Heating and air conditioning costs reduced thanks to the compensated air flow.

Construction

- Entirely constructed in 304 AISI stainless steel.
- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- Outlet holes are sized in order to minimize drops in pressure.
- 304 AISI stainless steel labyrinth filters easily removable for cleaning.
- Built-in lighting with protective screen.
- Optional accessory: air intake Plenum, which is insulated to avoid condensation.
- Rear exhaust with filters and front air intake through a narrow slot sized to obtain the correct induction effect.
- Perforated panel inside the intake circuit guarantees a perfect and uniform air distribution.
- Completely insulated intake area to avoid external condensation.
- Two separate air circuits (extraction and intake) to reduce the quantity of treated air released in the environment.
- Constructed as 2 separate wall units to join on site back to back.
- Central gutter with drain hole to transfer grease into two 304 AISI containers.

Optional Accessories

PNC Code	Description
----------	-------------

Other accessories

644802	LED strip for hoods 1550 mm
--------	-----------------------------

Technical specifications

Electric

Supply voltage: 220 V/1N ph/50 Hz

Key Information:

External dimensions, Width: 3200 mm

External dimensions, Depth: 2600 mm


External dimensions, Height: 500 mm

Net weight: 314 kg


Air Emission:

Air capacity: 10500 mc/h


Front



Side

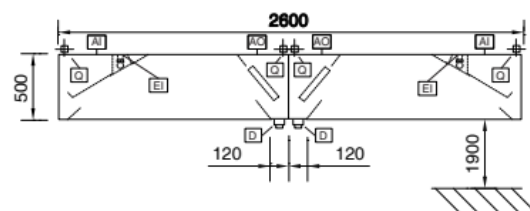

Top

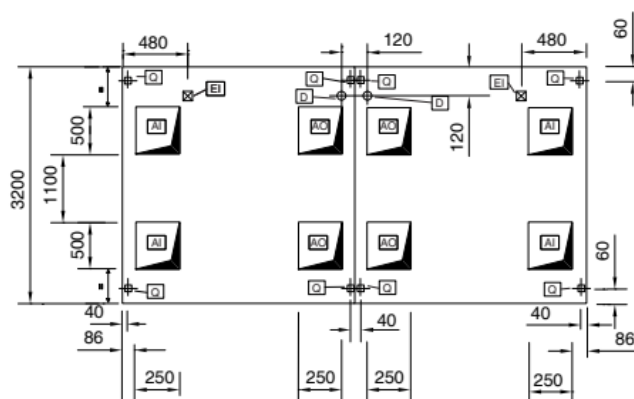

EI = Electrical inlet (power)



Part of



**Electrolux
Professional
Group**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

www.zanussiprofessional.com

2026/05/10

2/2