

**640233 (STPF1340)**

304 s/s wall hood with filters and lamps

**Main Features**

- Low noise level.
- External panels with upturned edges to avoid injuries.
- Heating and air conditioning costs reduced thanks to the compensated air flow.

**Construction**

- Entirely constructed in 304 AISI stainless steel.
- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- Outlet holes are sized in order to minimize drops in pressure.
- Perimetral gutter with drain hole to transfer grease into a 304 AISI container.
- 304 AISI stainless steel labyrinth filters easily removable for cleaning.
- Built-in lighting with protective screen.
- Optional accessory: air intake Plenum, which is insulated to avoid condensation.
- Rear exhaust with filters and front air intake through a narrow slot sized to obtain the correct induction effect.
- Perforated panel inside the intake circuit guarantees a perfect and uniform air distribution.
- Completely insulated intake area to avoid external condensation.
- Two separate air circuits (extraction and intake) to reduce the quantity of treated air released in the environment.

**Optional Accessories**

| PNC Code                 | Description                 |
|--------------------------|-----------------------------|
| <b>Other accessories</b> |                             |
| 644801                   | LED strip for hoods 1250 mm |

# Technical specifications

## Electric

**Supply voltage:** 220 V/1N ph/50 Hz

## Key Information:

**External dimensions, Width:** 4000 mm

**External dimensions, Depth:** 1300 mm


**External dimensions, Height:** 500 mm

**Net weight:** 243 kg


## Air Emission:

**Air capacity:** 5800 mc/h


Front

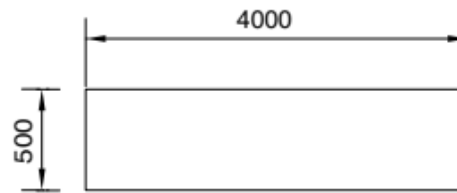

Side

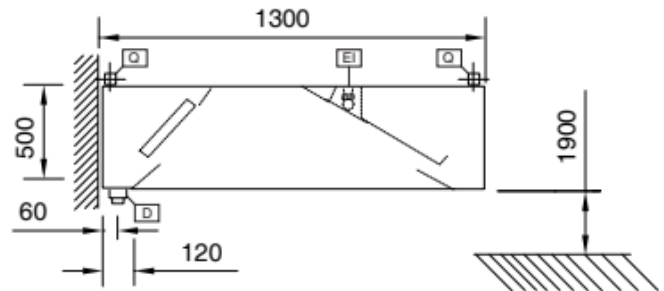

Top

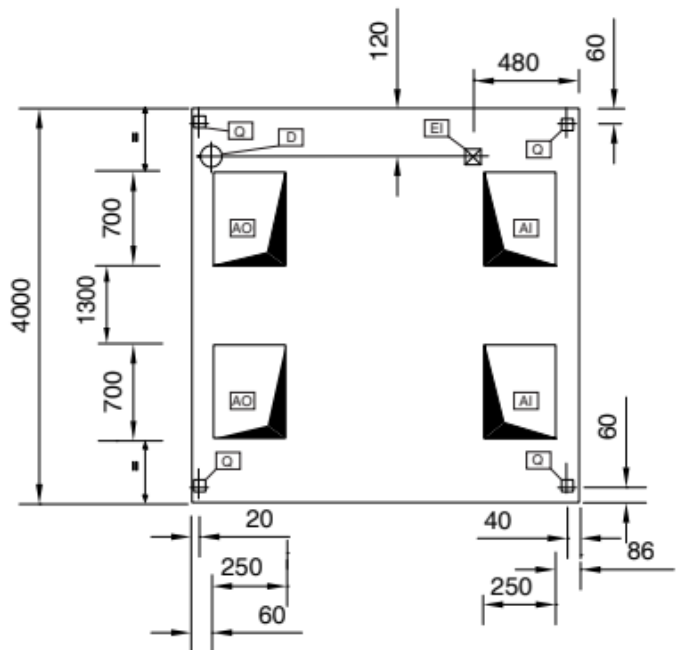

EI = Electrical inlet (power)

