

**641250 (STPF1116)**

304 s/s wall hood with filters and lamps

Main Features

- Low noise level.
- External panels with upturned edges to avoid injuries.
- Heating and air conditioning costs reduced thanks to the compensated air flow.

Construction

- Entirely constructed in 304 AISI stainless steel.
- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- Outlet holes are sized in order to minimize drops in pressure.
- Perimetral gutter with drain hole to transfer grease into a 304 AISI container.
- 304 AISI stainless steel labyrinth filters easily removable for cleaning.
- Built-in lighting with protective screen.
- Optional accessory: air intake Plenum, which is insulated to avoid condensation.
- Rear exhaust with filters and front air intake through a narrow slot sized to obtain the correct induction effect.
- Perforated panel inside the intake circuit guarantees a perfect and uniform air distribution.
- Completely insulated intake area to avoid external condensation.
- Two separate air circuits (extraction and intake) to reduce the quantity of treated air released in the environment.

Optional Accessories

PNC Code	Description
Other accessories	
644802	LED strip for hoods 1550 mm

Technical specifications

Electric

Supply voltage: 220 V/1N ph/50 Hz

Key Information:

External dimensions, Width: 1600 mm

External dimensions, Depth: 1100 mm


External dimensions, Height: 500 mm

Net weight: 111 kg


Air Emission:

Air capacity: 2000 mc/h


Front

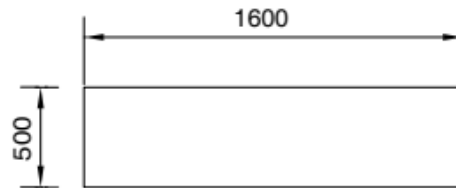

Side

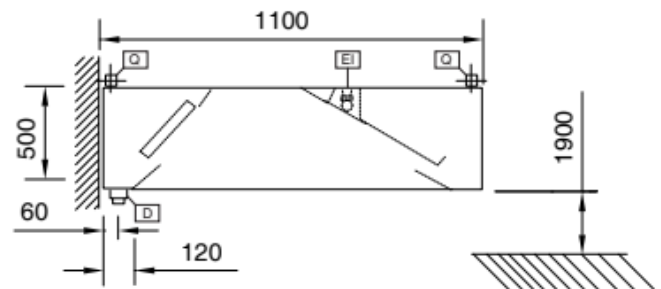

Top

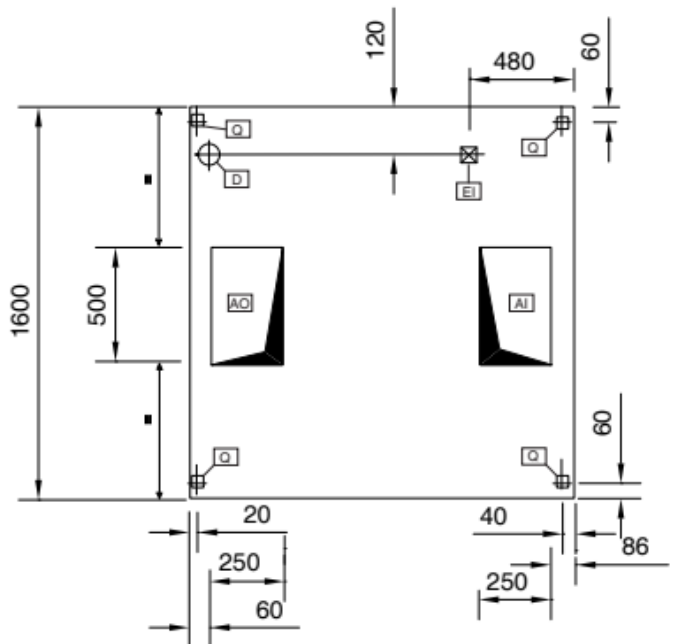

EI = Electrical inlet (power)



Part of



**Electrolux
Professional
Group**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

www.zanussiprofessional.com

2026/05/10

2/2