

**642166 (BP1416DT)**

304 s/s wall hood with filters

Main Features

- Low noise level.
- External panels with upturned edges to avoid injuries.
- Prearranged for installation of lighting.

Construction

- Entirely constructed in 304 AISI stainless steel.
- Eyebolts and screw anchors for ceiling installation.
- 304 AISI stainless steel condensation collection tray.
- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- 304 AISI stainless steel blind panels for a correct exhaustion.
- Outlet holes are sized in order to minimize drops in pressure.
- Perimetral gutter with drain hole to transfer grease into a 304 AISI container.
- 304 AISI stainless steel labyrinth filters easily removable for cleaning.

Optional Accessories


PNC Code	Description
Installation solutions	
640409	Drain for hoods diam.1/2" (m) with plug
Other accessories	
640076	1-phase controller for exhausters up to 1,17 kw
644802	LED strip for hoods 1550 mm

Technical specifications


Key Information:

External dimensions, Width:	1600 mm
External dimensions, Depth:	1400 mm
External dimensions, Height:	500 mm
Net weight:	46 kg
Air Emission:	
Air capacity:	2900 mc/h

Front



Side

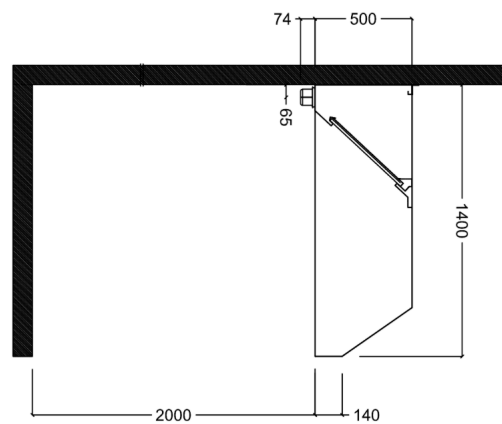

Top

