

**642090 (MP1116DT)**

304 s/s wall hood with filters

**Main Features**

- Low noise level.
- External panels with upturned edges to avoid injuries.
- Prearranged for installation of lighting.

**Construction**

- Entirely constructed in 304 AISI stainless steel.
- Eyebolts and screw anchors for ceiling installation.
- Back drain pipe with drain hole to transfer grease into a 304 AISI container.
- 304 AISI stainless steel condensation collection tray.
- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- 304 AISI stainless steel blind panels for a correct exhaustion.
- Outlet holes are sized in order to minimize drops in pressure.
- 304 AISI stainless steel labyrinth filters easily removable for cleaning.

**Optional Accessories**


| PNC Code                      | Description                                     |
|-------------------------------|-------------------------------------------------|
| <b>Installation solutions</b> |                                                 |
| 640409                        | Drain for hoods diam.1/2" (m) with plug         |
| <b>Other accessories</b>      |                                                 |
| 640076                        | 1-phase controller for exhausters up to 1,17 kw |
| 644802                        | LED strip for hoods 1550 mm                     |

## Technical specifications


**Key Information:**

|                                     |           |
|-------------------------------------|-----------|
| <b>External dimensions, Width:</b>  | 1600 mm   |
| <b>External dimensions, Depth:</b>  | 1100 mm   |
| <b>External dimensions, Height:</b> | 500 mm    |
| <b>Net weight:</b>                  | 40 kg     |
| <b>Air Emission:</b>                |           |
| <b>Air capacity:</b>                | 2300 mc/h |

Front



Side

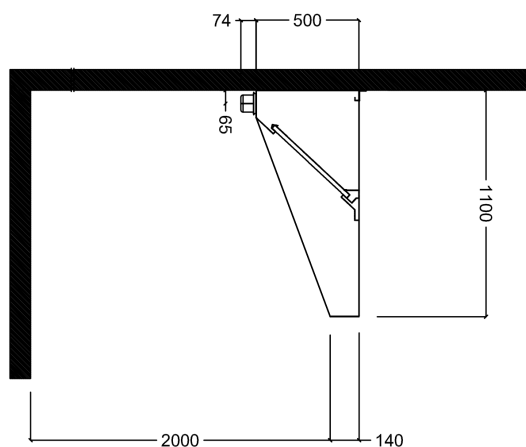

Top

