

**642095 (MP1136DT)**

304 s/s wall hood with filters

**Main Features**

- Low noise level.
- External panels with upturned edges to avoid injuries.
- Prearranged for installation of lighting.

**Construction**

- Entirely constructed in 304 AISI stainless steel.
- Eyebolts and screw anchors for ceiling installation.
- Back drain pipe with drain hole to transfer grease into a 304 AISI container.
- 304 AISI stainless steel condensation collection tray.
- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- 304 AISI stainless steel blind panels for a correct exhaustion.
- Outlet holes are sized in order to minimize drops in pressure.
- 304 AISI stainless steel labyrinth filters easily removable for cleaning.

**Optional Accessories**


| PNC Code                      | Description                             |
|-------------------------------|-----------------------------------------|
| <b>Installation solutions</b> |                                         |
| 640409                        | Drain for hoods diam.1/2" (m) with plug |
| <b>Other accessories</b>      |                                         |
| 640686                        | Speed variator for motors up to 1.7 kW  |
| 644802                        | LED strip for hoods 1550 mm             |

# Technical specifications


## Key Information:

|                              |           |
|------------------------------|-----------|
| External dimensions, Width:  | 3600 mm   |
| External dimensions, Depth:  | 1100 mm   |
| External dimensions, Height: | 500 mm    |
| Net weight:                  | 80 kg     |
| Air Emission:                |           |
| Air capacity:                | 5200 mc/h |

Front

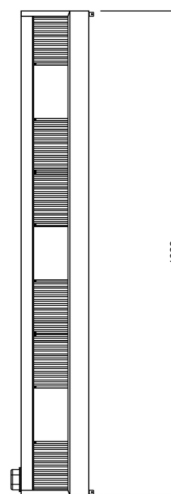

Side



Top

