

**641395 (STCF3028)**

304 s/s island hood with filters and lamps

**Main Features**

- Low noise level.
- External panels with upturned edges to avoid injuries.
- Heating and air conditioning costs reduced thanks to the compensated air flow.

**Construction**

- Entirely constructed in 304 AISI stainless steel.
- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- Outlet holes are sized in order to minimize drops in pressure.
- 304 AISI stainless steel labyrinth filters easily removable for cleaning.
- Built-in lighting with protective screen.
- Optional accessory: air intake Plenum, which is insulated to avoid condensation.
- Rear exhaust with filters and front air intake through a narrow slot sized to obtain the correct induction effect.
- Perforated panel inside the intake circuit guarantees a perfect and uniform air distribution.
- Completely insulated intake area to avoid external condensation.
- Two separate air circuits (extraction and intake) to reduce the quantity of treated air released in the environment.
- Constructed as 2 separate wall units to join on site back to back.
- Central gutter with drain hole to transfer grease into two 304 AISI containers.

**Optional Accessories**

| PNC Code | Description |
|----------|-------------|
|----------|-------------|

**Other accessories**

|        |                             |
|--------|-----------------------------|
| 644801 | LED strip for hoods 1250 mm |
|--------|-----------------------------|

# Technical specifications

## Electric

**Supply voltage:** 220 V/1N ph/50 Hz

## Key Information:

**External dimensions, Width:** 2800 mm

**External dimensions, Depth:** 3000 mm


**External dimensions, Height:** 500 mm

**Net weight:** 364 kg


## Air Emission:

**Air capacity:** 10600 mc/h

Side

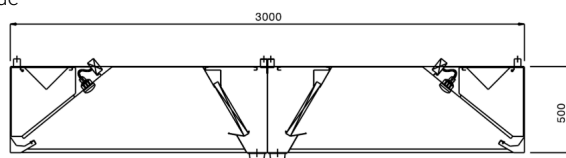

Top

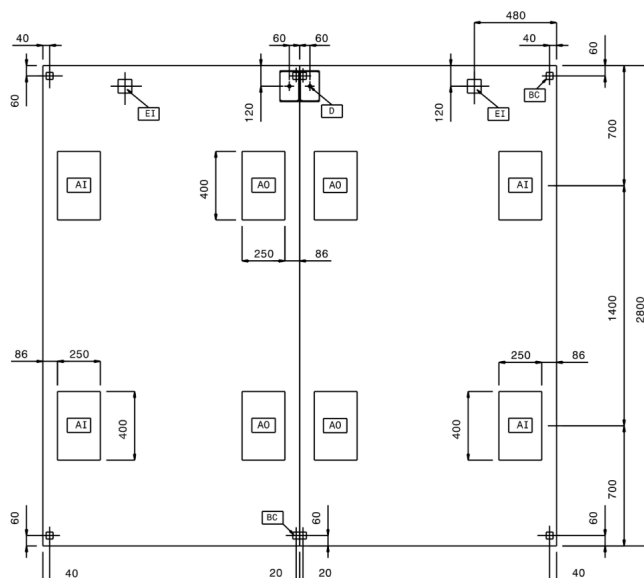

EI = Electrical inlet (power)

