

**506072 (ZPPWEHGC)**

Electric pot & pan washer, compact, with electronic control, drain pump, detergent and rinse aid dispenser, high opening

**Main Features**

- Fault auto-diagnosis system.
- Simple service from the front.
- Atmospheric insulated boiler combined with the rinse booster pump for perfect rinsing results (water temperature and pressure always constant during rinsing cycles), independent from the inlet water pressure.
- Green light of "WASH SAFE CONTROL" confirms that items have been rinsed properly.
- High efficiency air gap (class A) in water inlet circuit to avoid water being siphoned back into the network as a result of a sudden drop in main pressures.
- Open air gap in compliance with WRC regulations.
- 4 washing programs (one program is continual).
- Equipped with drain pump and built-in detergent dispenser for easy and quick installation without opening the machine.
- Easier access to the washing chamber thanks to the 180° frontal opening door.
- Requires limited space for opening thanks to the door divided in 2 sections.
- Self-cleaning cycle.
- Low noise level.
- Simple electronic control panel.
- Available upon request, pre-arranged model for HACCP implementation (both basic as well as integrated system).

**Construction**

- Unit to feature smooth surfaces to facilitate cleaning.
- Unit to feature rinse aid dispenser pump.
- 304 stainless steel boiler with higher welding protection to increase resistance to corrosion.
- External connecting board protected by a waterproof plastic box.
- Easy to remove pump and tank filters.
- Large strainer box above the water surface for frequent cleaning operations.
- Equipped with side washing arms in addition to upper and lower wash arms.
- 304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms.

## Sustainability

- Double skin insulated door to reduce heat dispersion.
- Pre-arranged to be connected to Energy Management device.

## Included Accessories

| PNC Code | Description                 | Quantity |
|----------|-----------------------------|----------|
| 864471   | Kit for trays in Potwashers | 1        |

## Optional Accessories

| PNC Code                 | Description                                 |
|--------------------------|---------------------------------------------|
| <b>Baskets</b>           |                                             |
| 864182                   | Extra rack for containers and trays         |
| 864471                   | Kit for trays in Potwashers                 |
| <b>Water treatment</b>   |                                             |
| 864017                   | Filter for partial demineralization         |
| 864050                   | Kit to measure total/partial water hardness |
| 864367                   | Filter for total demineralization           |
| <b>Other accessories</b> |                                             |
| 864015                   | Filter for total demineralization           |

## Technical specifications

## Electric

|                                 |                       |
|---------------------------------|-----------------------|
| <b>Supply voltage:</b>          | 380-415 V/3N ph/50 Hz |
| <b>Default Installed Power:</b> | 12 kW                 |
| <b>Wash pump power:</b>         | 2.7 kW                |

**Water:**

|                                           |           |
|-------------------------------------------|-----------|
| <b>Washing cycle electrical elements:</b> | 7 kW      |
| <b>Hot rinse cycle duration (sec.):</b>   | 14        |
| <b>Water supply temperature*:</b>         | 50 °C     |
| <b>Washing tank capacity (lt):</b>        | 84        |
| <b>Boiler Capacity (lt):</b>              | 12        |
| <b>Pressure, bar min/max:</b>             | 0.5-7 bar |


**Key Information:**

|                                     |          |
|-------------------------------------|----------|
| <b>Washing cycle temperature:</b>   | 55-65 °C |
| <b>Hot rinse cycle temperature:</b> | 84 °C    |
| <b>External dimensions, Width:</b>  | 775 mm   |
| <b>External dimensions, Depth:</b>  | 900 mm   |
| <b>External dimensions, Height:</b> | 1992 mm  |
| <b>Net weight:</b>                  | 217 kg   |
| <b>Shipping weight (gross):</b>     | 244 kg   |
| <b>Shipping height:</b>             | 2245 mm  |
| <b>Shipping width:</b>              | 1035 mm  |
| <b>Shipping depth:</b>              | 925 mm   |
| <b>Shipping volume:</b>             | 2.15 m³  |


## Sustainability

|                                        |        |
|----------------------------------------|--------|
| Rinsing water consumption (per cycle): | 4.7 lt |
|----------------------------------------|--------|


Front

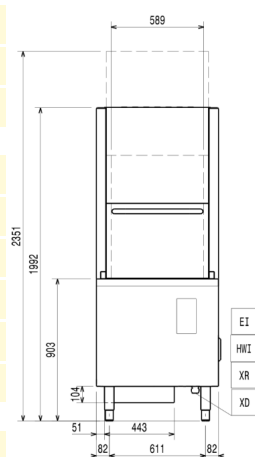

Side

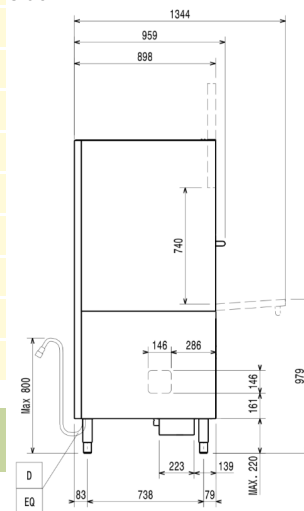

Top

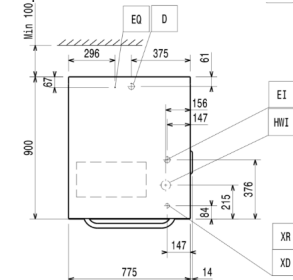

D = Drain

El = Electrical inlet (power)

HWI = Hot water inlet

XD = Detergent connection

EO = Electrical Outlet

