


**Ice Cuber (14gr), 23kg/24h, 6kg bin, air-cooled****14 g****R290** **730300 (ICA22I6SNP)**

Ice maker, cube (14gr), 22 kg/24h, self-contained, 6kg ice collection bin included, air-cooled

**Main Features**

- Compliant to CE requirements for safety.
- Food grade ABS interior.
- Fully automatic in operation.
- Suitable for gravity drain only.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.
- Water consumption and productivity calculated using 15°C water temperature and 21°C ambient temperature.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Bin included.
- Ice cube pyramid-trunk shape.
- The ice making method guarantees a continuous and reliable production.
- Easy cleanability guaranteed by an automatic system: the cleaning switch activate the circulation and the rinse of water; at the end of the cycle just swithed again to start producing ice.
- Rounded internal corners of the bin assure ease of cleaning.
- The innovative anti-scale spray system with flexible nozzles avoids limescale deposits through small vibrations.

**Construction**

- Easy access to the main components for maintenance.
- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- The sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- ON-OFF rocker switch.
- 5mm adjustable feet.
- Internal ice containers in ABS.
- Reliability guaranteed by the quality of the construction materials used (front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- Hygienical plastic spray arms removable without the use of tools.
- Aluminium evaporator ensures a safe contact with ice.
- Sturdy door opening system made in AISI 304 stainless steel.
- Supplied with flexible water supply, drain hoses and scoop.

## Sustainability

- Reduced energy consumption by fully insulated storage bin.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

## Optional Accessories

| PNC Code                 | Description                              |
|--------------------------|------------------------------------------|
| <b>Other accessories</b> |                                          |
| 0S1628                   | PURITY C150 QUELL KIT WITH OF FLOW METER |
| 0S1629                   | PURITY C300 QUELL KIT WITH OF FLOW METER |
| 880690                   | Drain pump kit                           |

## Recommended Detergents

| PNC Code | Description                                                                   |
|----------|-------------------------------------------------------------------------------|
| 0S2881   | S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T                   |
| 0S2883   | S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity |
| 0S2884   | S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML                       |
| 0S3257   | S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity         |

# Technical specifications

## Electric

**Supply voltage:** 220-240 V/1N ph/50 Hz

## Water:

**Water outlet size:** 25mm

## Capacity:

**Bin capacity:** 6 kg

## Key Information:

**External dimensions, Width:** 350 mm

**External dimensions, Depth:** 475 mm

**External dimensions, Height:** 601 mm

**Net weight:** 32 kg

**Output:** 22 kg/day

**Kind of cube:** Ice Cube 14 g


## Sustainability

**Refrigerant type:** R290


**Refrigerant weight:** 70 g

**Water consumption:** 4.1 lt/hr


Front

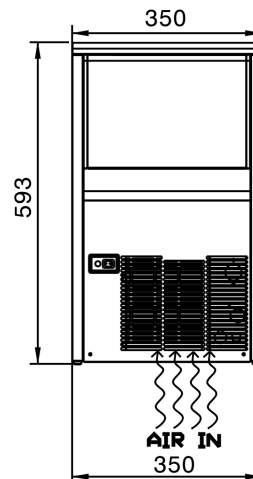

Side

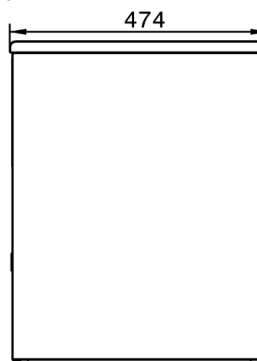

Top



CWI1 = Cold Water inlet 1 (cleaning)

D = Drain

EI = Electrical inlet (power)